



**TIANJIN JIAXING IMP & EXP
CO.,LTD**

Product catalog

- 1.PVC Roof Product
- 2.UPVC Roof Sheet Product
- 3.PC Roof Sheet Product
- 4.FRP Roof Panel Product
- 5.PVC Marble Sheet Product
- 6.Wpc panel Product



1.Pvc Roof sheet Photo

(1) Glazed tile type



Model Number	#1050-160-30
Type	Spanish Style
Overall Width	1050mm
Effective Width	960mm
Thickness	2.3mm / 2.5mm / 2.8mm / 3.0mm
Length	Must be a multiple of section
Color	Orange / Red / Grey / Sky blue / Dark green
Wave Spacing	160mm
Wave Height	30mm
Section Length	219mm



Claret



Orange



Blue




Dark Gray



Dark Green



Brick



Blue Gray

(2) Trapezoid type-1



Material	Surface ASA, body PVC
Surface Color	Terra Cotta, Red, Blue , Green
Bottom Color	White
Structure	4 layer
Surface	Embossed
Profile	T1000 , T1050 , T830 ,Z930 , Greca, Roma
Thickness	1.5mm , 2.0mm , 2.5mm , 3.0mm
Width	T1000: 1075mm ; T1050: 1130mm/1350mm;T830 : 900mm; Z930 1930mm/1120mm ; Greca :820mm ; Roma :820mm
Length	Maximal 11800mm
Depth	T1000: 40mm ; T1050: 26mm; T830 : 40mm; Z930 :16mm ; Greca : 16mm ; Roma : 16mm



Claret

Orange

Blue


Dark Gray

Dark Green

Brick



Blue Gray

(3)other Trapezoid type

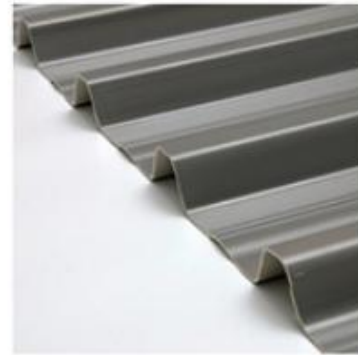


T940

Width: 940mm
Efficient Width: 850mm
Thickness: 2.0mm, 2.5mm, 3.0mm
Length: Customized
Purlin Distance: ≤ 1200 mm
Application: roof, ceiling, wall panel etc.

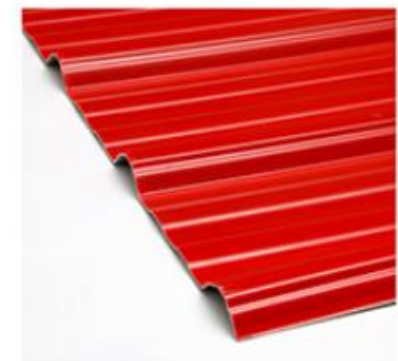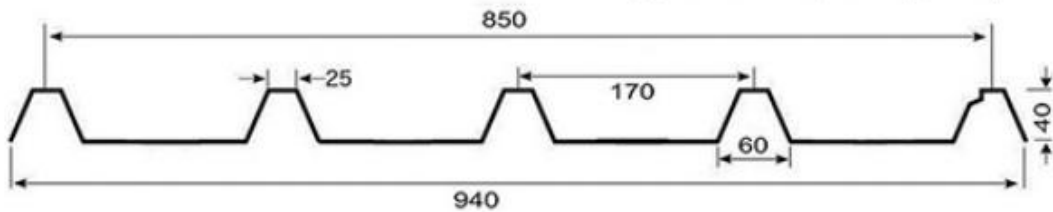


T920

Width: 920mm
Efficient Width: 840mm
Thickness: 1.5mm, 2.0mm, 2.5mm, 3.0mm
Length: Customized
Purlin Distance: ≤ 800 mm
Application: roof, ceiling, wall panel etc..

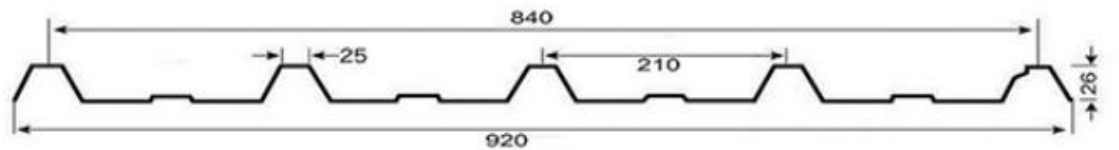

(4) Pvc Accessories photo

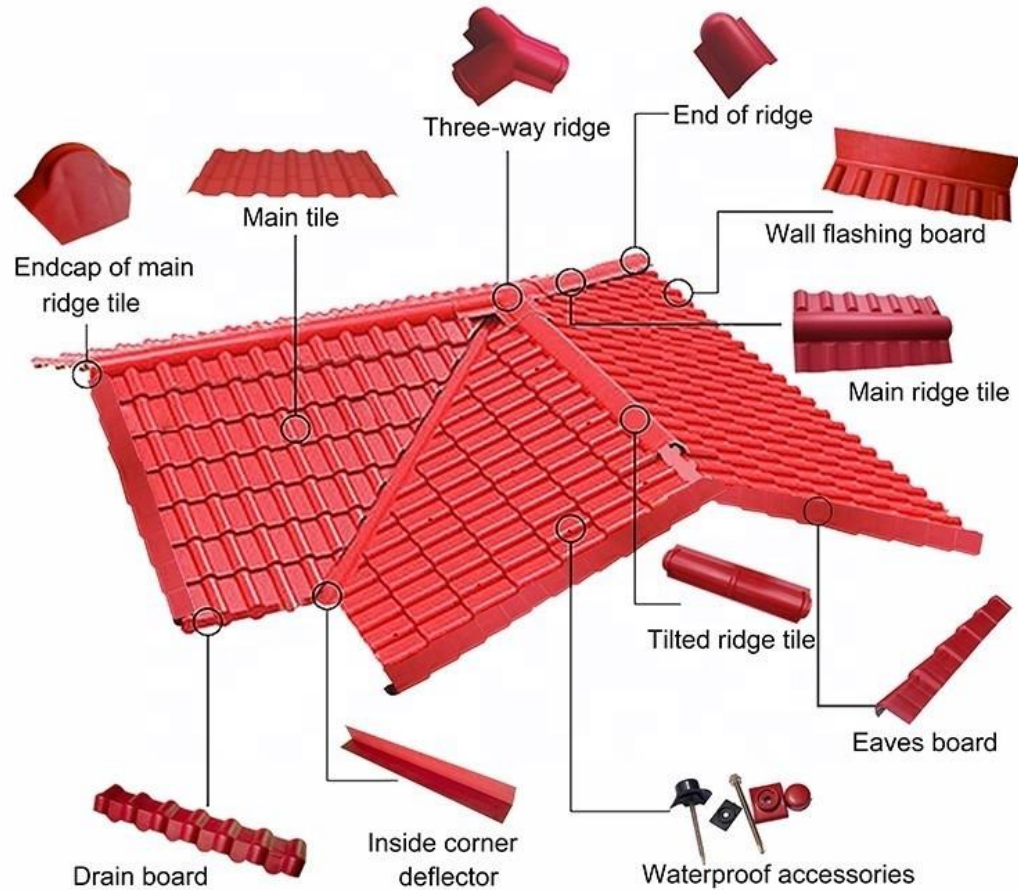

Name	Sample	Size and Usage	Material	Model No	Unit
top ridge		length:880mm,1050mm effective length:800mm,960mm	ASA&PVC	ASA-02	piece
slope ridge		length:880mm,1050mm effective length:800mm,960mm	ASA&PVC	ASA-03	piece
wall flashing board		length:880mm,1050mm	ASA&PVC	ASA-04	piece
side ridge cover		length:1200mm effective length:1100mm	ASA&PVC	ASA-05	pair
top ridge cover		cover with top ridge	ASA&PVC	ASA-06	piece
end cap		cover with slope ridge	ASA&PVC	ASA-07	piece
three direct links		300*(300*300mm)	ASA&PVC	ASA-08	piece
valley gutter		length:880mm,1050mm	ASA&PVC	ASA-09	piece
eaves		length:500mm	ASA&PVC	ASA-10	piece
pressure plate and screw		function:fastening,water and wind resistance	ASA&Steel	ASA-11	set

2.UPVC Roof sheet Product

(1)Trapezoid type



Type	ASA PVC, APVC,UPVC		
Total Width	1360mm, 1130mm, 1070, 1030mm, etc		
Effective Width	1260mm, 1050mm, 1000mm, 930mm, etc		
Length	Maximal length in 20ft container 5.8m, Maximal length in 40ft container 11.8m,		
Thickness	2.0mm±0.1	2.5mm±0.1	3.0mm±0.1
Weight	3.9±0.1(kg/m ²)	4.9±0.1(kg/m ²)	5.9±0.1(kg/m ²)
Container Loading capacity	Thickness(mm)	SQ.M./20 FCL (28 tons)	SQ.M./40 FCL (28 tons)
	2.0	6800	6800
	2.5	5600	5600
	3.0	4600	4600



(2) corrugated type



Material	PVC
Surface Color	White
Bottom Color	White
Structure	4 layer or 3 layer
Surface	Smooth
Profile	T1000 , T1050 , T830 ,Z930 , Greca, Roma
Thickness	1.5mm , 2.0mm , 2.5mm , 3.0mm
Width	T1000: 1075mm ; T1050: 1130mm/1350mm; T830 : 900mm; Z930 1930mm/1120mm ; Greca :820mm ; Roma :820mm
Length	Maximal 11800mm
Depth	T1000: 40mm ; T1050: 26mm; T830 : 40mm; Z930 :16mm ; Greca : 16mm ; Roma : 16mm




3.PC Roof sheet Product

(1) Galzed tile type




<u>Technical Specifications of Corrugated PC Sheet</u>	
Material	100% virgin bayer
Light Transmission	Up to 80%
Light Weight	Only 1/12 of the weight of glass of the same thickness
Impact Resistance	80 times that of glass, 15 times that of acrylic sheeting
Temperature Resistance Range	-40— —120°C
Ultraviolet Resistance	With UV protective layer
Flame Resistance	Rated class B1
Guarantee	usually 10 years
Certification	ISO 9001:2008, SGS
Delivery Time	7-10 work days after confirm your deposit
Sample	Free of charge

(2) Trapezoid type

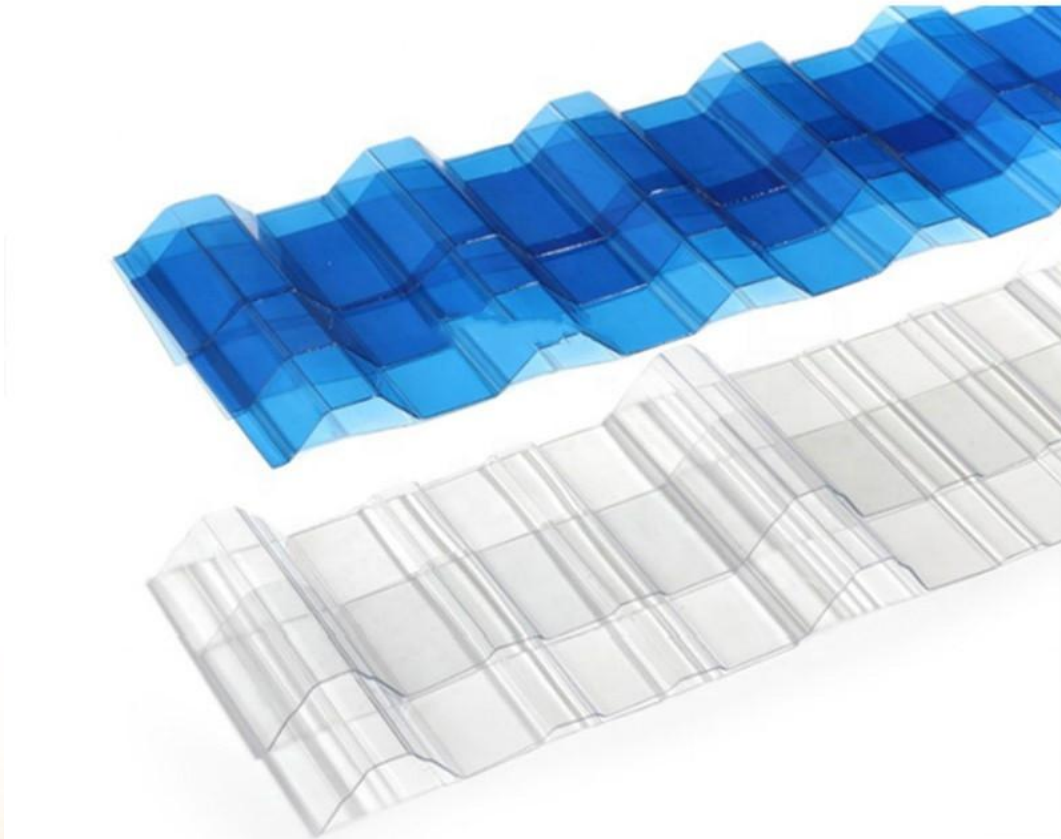

Technical Specifications of Corrugated PC Sheet

Material	100% virgin bayer
Light Transmission	Up to 80%
Light Weight	Only 1/12 of the weight of glass of the same thickness
Impact Resistance	80 times that of glass, 15 times that of acrylic sheeting
Temperature Resistance Range	-40— —120°C
Ultraviolet Resistance	With UV protective layer
Flame Resistance	Rated class B1
Guarantee	usually 10 years
Certification	ISO 9001:2008, SGS
Delivery Time	7-10 work days after confirm your deposit
Sample	Free of charge

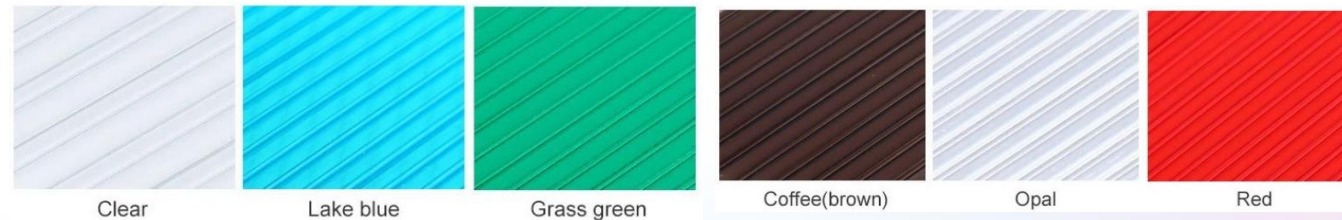

(3) Corrugated type



Technical Specifications of Corrugated PC Sheet

Material	100% virgin bayer
Light Transmission	Up to 80%
Light Weight	Only 1/12 of the weight of glass of the same thickness
Impact Resistance	80 times that of glass, 15 times that of acrylic sheeting
Temperature Resistance Range	-40—120°C
Ultraviolet Resistance	With UV protective layer
Flame Resistance	Rated class B1
Guarantee	usually 10 years
Certification	ISO 9001:2008, SGS
Delivery Time	7-10 work days after confirm your deposit
Sample	Free of charge



Clear

Lake blue


Grass green

Coffee(brown)

Opal

Red

(4) Polycarbonate sheet-1

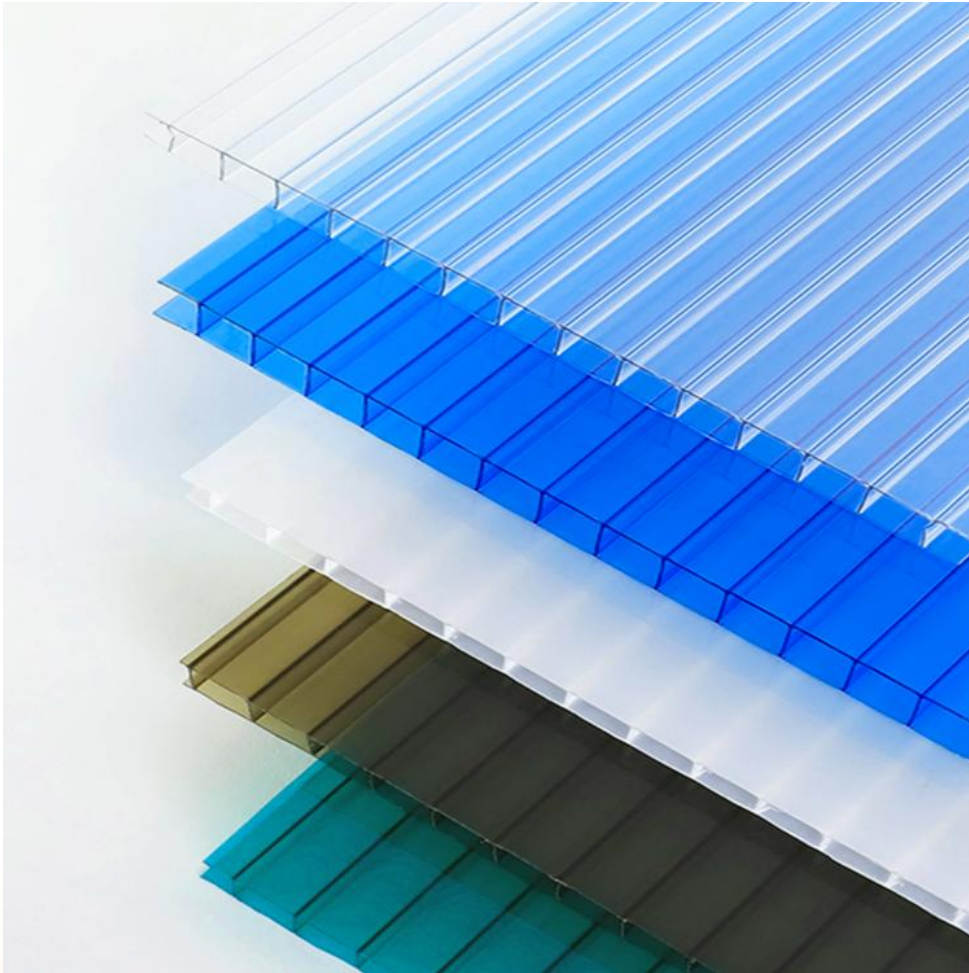

(1 layer type)

Item Name:	polycarbonate hollow / plastic sheet board construction materials
Material:	100% bayer material or sabic material or customized
Place of origin:	Hebei, China
Color:	Clear,Blue,Lake Blue,Green,Bronze,Opal or Customized
Regular Width:	1220mm,1560mm,1820mm,2100mm or can be cut
Thickness:	Twin wall polycarbonate sheet:2.8mm - 12mm Four wall polycarbonate sheet:8mm - 20mm Honeycomb polycarbonate sheet:8mm - 12mm
Regular Length:	2400mm,5800mm,6000mm,11800mm,12000mm or according to your requirement
Warranty:	10-Year
Certification:	ISO 9001:2008
Surface:	Anti-fog, UV protection
UV thickness:	50 micron
Samples:	Free samples will send you for test



Clear

Lake blue

Grass green

Coffee(brown)

Opal

Red

(4) Polycarbonate sheet-2



(2 layer type)

Item Name:	polycarbonate hollow / plastic sheet board construction materials
Material:	100% bayer material or sabic material or customized
Place of origin:	Hebei, China
Color:	Clear,Blue,Lake Blue,Green,Bronze,Opal or Customized
Regular Width:	1220mm,1560mm,1820mm,2100mm or can be cut
Thickness:	Twin wall polycarbonate sheet:2.8mm - 12mm Four wall polycarbonate sheet:8mm - 20mm Honeycomb polycarbonate sheet:8mm - 12mm
Regular Length:	2400mm,5800mm,6000mm,11800mm,12000mm or according to your requirement
Warranty:	10-Year
Certification:	ISO 9001:2008
Surface:	Anti-fog, UV protection
UV thickness:	50 micron
Samples:	Free samples will send you for test



Clear

Lake blue


Grass green

Coffee(brown)

Opal

Red


(4) Polycarbonate sheet-other type

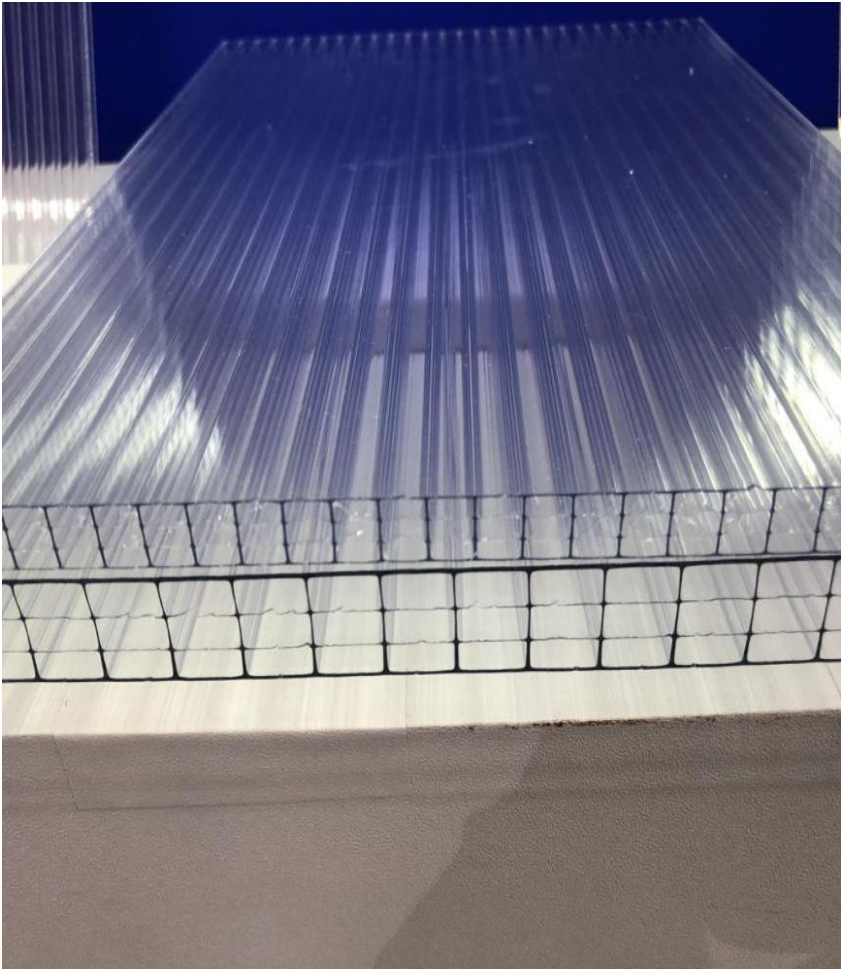

(3 layer type)




(honeycomb type)

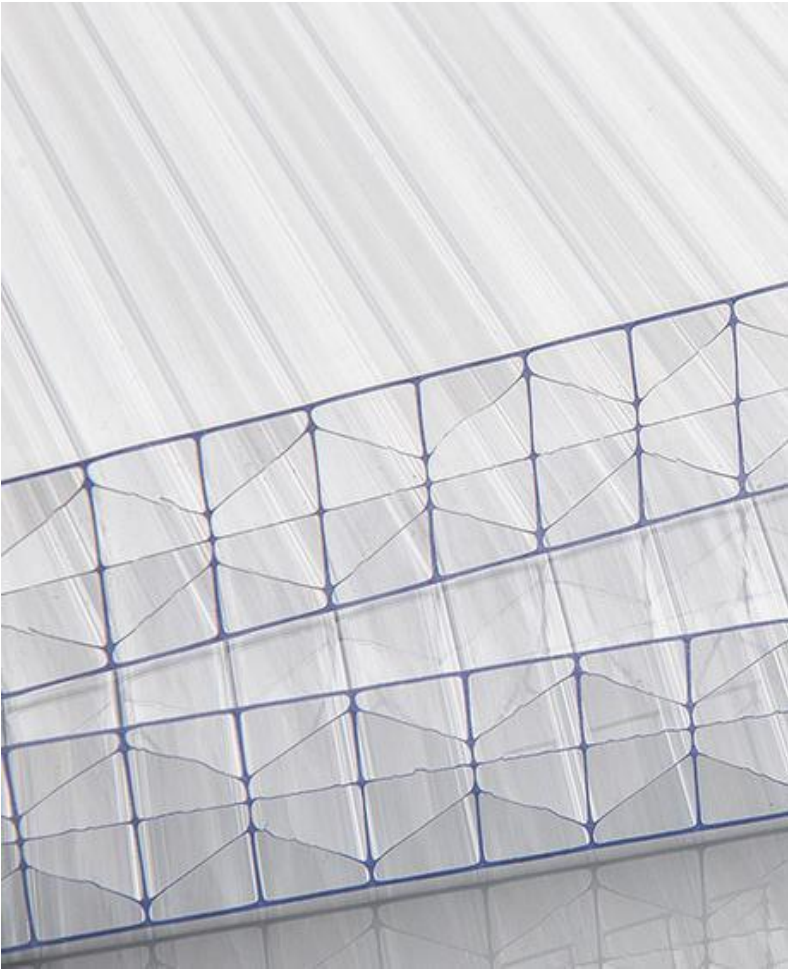

(5 layer type)

(5) Pc endurance sheet

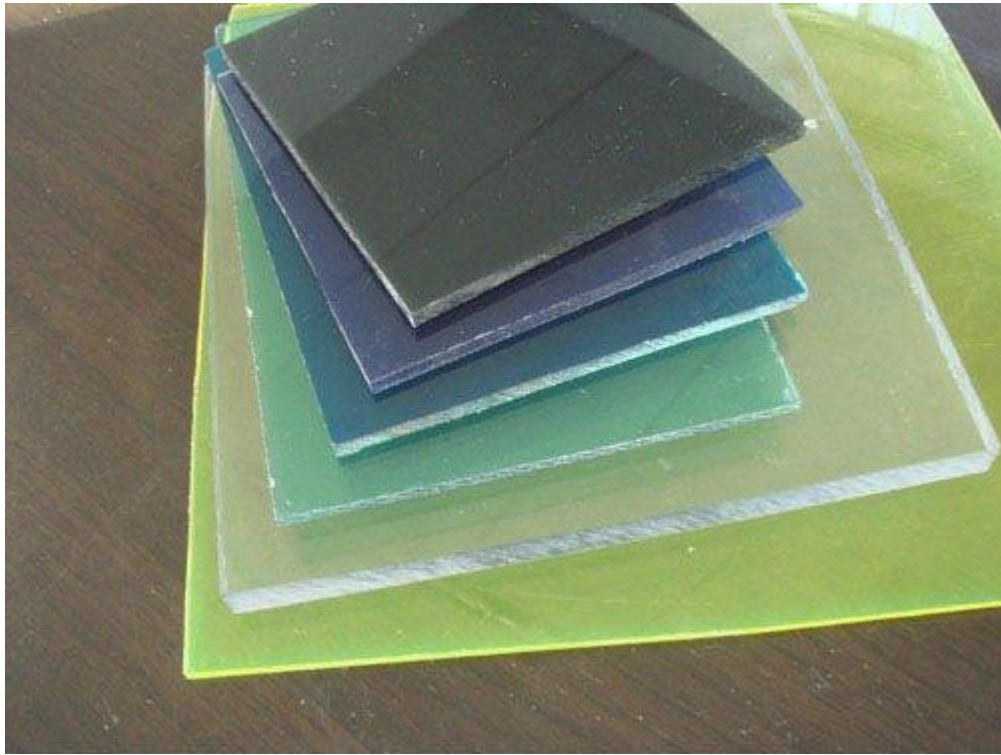

Characteristics	Unit	Polycarbonate solid sheet (PC) sheet
Impact Strength	J	50
Light Transimssion	%	88-92
Specific Gravity	g/cm ³	1.2
Coefficient of Thermal Expansion	mm/m°C.	0.065
Service Temperature	°C	-40°C~+120°C
Heat Conductivity	W/m ² ·°C	0.21
Tensile Strength	N/mm	≥60
Flexural Strength	Mpa	100
Modulus of Elasticity	mpa	2400
Tensile Stress at Break	%	≥65
Elongation at Break		>100
Effect of sound proof		35 decibel decrease for 6mm soild sheet




(5) Pc endurance sheet-other



(Scrub type)



(litchi Granule type)

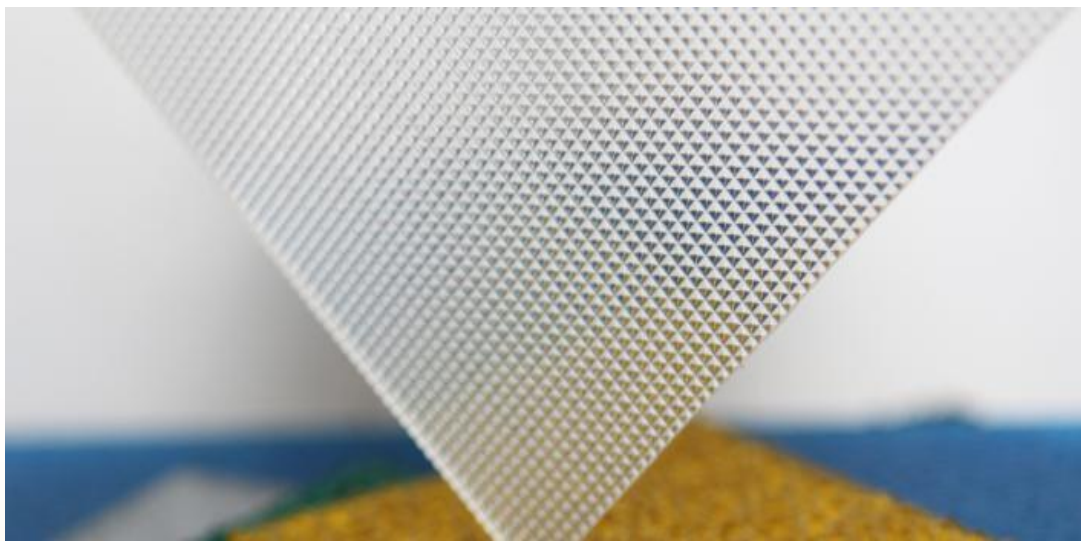

(diamond Granule type)

4.FRP Roof panel Product

(1) Corrugated type



Product Kind	Economic daylighting plate		
Width	1500mm(max)		
Thickness	0.5-3.0mm (Common Specification:1.0mm /1.2mm /1.5mm /2.0mm/ 2.5mm)		
Thickness Tolerance	+/-0.2mm		
Length	as clients requirement		
Color	as clients requirement (Common Specification:light blue/sea blue/sky blue/milky white/transparency/grey)		
Coating	20 microns Garware PT 055 film on surface		
Resin component	Unsaturated polyester resin, use FL603U high-quality unsaturated resin		
Reinforced fiberglass	Minimum content: 22%, use CTGEMC high-quality fiberglass		
Unit weight	1800g/m2	2400g/m2	3050g/m2
Standard thickness	1.2mm	1.5mm	2.0mm
Light transmittance	75%(light blue), 65%(milky)		
Thermal penetrability	70%(light blue), 62%(milky)		
Temperature tolerance	-20°C~+95°C		
Thermal expansion coefficient	2.55×10 ⁻⁵ cm/cm/°C		
Ultraviolet resistance	over 90%		
Warranty years	10years 15years 20years		

(2) Trapezoid type



Product Kind	Economic daylighting plate		
Width	1500mm(max)		
Thickness	0.5-3.0mm (Common Specification:1.0mm /1.2mm /1.5mm /2.0mm/ 2.5mm)		
Thickness Tolerance	+/-0.2mm		
Length	as clients requirement		
Color	as clients requirement (Common Specification:light blue/sea blue/sky blue/milky white/transparency/grey)		
Coating	20 microns Garware PT 055 film on surface		
Resin component	Unsaturated polyester resin, use FL603U high-quality unsaturated resin		
Reinforced fiberglass	Minimum content: 22%, use CTGEMC high-quality fiberglass		
Unit weight	1800g/m2	2400g/m2	3050g/m2
Standard thickness	1.2mm	1.5mm	2.0mm
Light transmittance	75%(light blue), 65%(milky)		
Thermal penetrability	70%(light blue), 62%(milky)		
Temperature tolerance	-20°C~+95°C		
Thermal expansion coefficient	2.55×10 ⁻⁵ cm/cm/°C		
Ultraviolet resistance	over 90%		
Warranty years	10years 15years 20years		

5.PVC Marble Sheet Product



Material	PVC, 35% Pvc, 62% Caco3, 3% Additive
Thickness	2.5mm, 2.8mm, 3mm, 3.2mm, 3.5mm, 3.8mm
Size	1220mm*2440mm
Product name:	waterproof UV panel pvc marble sheet for wall
Brand Name	Witop
Color	marble, grain, wood grain, solid color and also can customized
Processing Service	Cutting, Moulding, uv board
Surface treatment	High-glossy, UV coating
Installation	Aluminum Frame or glue
Samples	free sample is available
Package	Wood pallet + Corner protection + Plastic straps
Delivery time	7-15 days for one container
Application	Interior decoration for commercial and residential places

Other Color (Customed)



6.WPC Panel Product Size:Can Customed



Model Number	YJ-1001
Application	Interior Wall Decoration
Raw Material	60%wood/bamboo Fiber+30%HDPE+10%additives
Color	Optional
Size	170*25mm
Installation	Quick Installation
Feature	Environment Friendly
Advantage	Fireproof+waterproof
Length	Customer's Demand
Technology	Latest Etex Tech
MOQ	350m

Other Color (Customed) Size:160mm*24mm



CONTACTS ME

Jodie Fu

- ① **facebook : 0086-18522400532**
- ② **Mobile/Whatsapp : 0086 18522400532**
- ③ **Email : jodie.jiaxing@gmail.com**

THANKS

